



TITLE:

# <Contributed Talk 32>Chaotic Streamlines in Steady Cavity Flows

AUTHOR(S):

Ishii, Katsuya; Adachi, Shizuko

---

CITATION:

Ishii, Katsuya ...[et al]. <Contributed Talk 32>Chaotic Streamlines in Steady Cavity Flows. IUTAM Symposium on 50 Years of Chaos : Applied and Theoretical 2011: 86-87

ISSUE DATE:

2011-12

URL:

<http://hdl.handle.net/2433/163117>

RIGHT:

## Chaotic Streamlines in Steady Cavity Flows

Katsuya Ishii<sup>1</sup>, Shizuko Adachi<sup>2</sup>

<sup>1</sup>Information Technology Center, Nagoya University, Nagoya 464-8601, [ishii@itc.nagoya-u.ac.jp](mailto:ishii@itc.nagoya-u.ac.jp)

<sup>2</sup>Tokyo International University, Kawagoe 350-1197, [sadachi@tiu.ac.jp](mailto:sadachi@tiu.ac.jp)

### Introduction

When a lid of a cavity moves in a direction parallel to the lid, flows are driven in the cavity. Since the internal flows display a lot of interesting physical phenomena, they have been one of the important subjects of studies in fluid mechanics. The internal flows in the closed system with the simplest geometry are theoretically as well as practically important.

The geometry of a three-dimensional lid-driven rectangular cavity with width  $H$ , depth  $D$  and span  $L$  is presented in Fig.1. The upper wall ( $y=1$ ) moves in  $x$ -direction with constant speed  $U$ . Non-dimensional geometrical parameters of the cavity are the aspect ratio  $\Gamma=D/H$  and the spanwise aspect ratio  $\Lambda=L/H$ . The flow parameter is the Reynolds number  $Re=U/H\nu$  where  $\nu$  is the kinematic viscosity.




Figure1: Geometry of a lid-driven cavity.

Streamlines and Poincaré sections are available for examining characteristic features of three-dimensional cavity flows. Ishii *et al.* [1,2] studied the streamline structure in the steady flow fields in a cubic cavity ( $\Gamma=\Lambda=1$ ) for  $Re$  from 100 to 400. They showed that Poincaré sections of the streamlines present various structures of invariant curves, resonant islands and chaotic distribution. And we studied [3] the steady flows in a long-span square cavity ( $\Gamma=1$ ) with  $\Lambda=6.55$ . In the present paper we report the results of numerical simulations for the incompressible steady flows in cavities with various values of the aspect ratio and the span aspect ratio.

### The Governing Equations

Flows are governed by the three-dimensional incompressible Navier-Stokes equations,

$$\frac{\partial \mathbf{u}}{\partial t} = -\mathbf{u} \cdot \nabla \mathbf{u} - \nabla p + \frac{1}{Re} \nabla^2 \mathbf{u} \quad (1), \quad \nabla \cdot \mathbf{u} = 0 \quad (2),$$

where  $\mathbf{u}(u,v,w)$  is the velocity and  $p$  is the pressure. All quantities are normalized with the cavity width  $H$ , the speed of the moving lid  $U$  and the constant density  $\rho$ .

Streamlines are determined by the following equations:  $\frac{dx}{u} = \frac{dy}{v} = \frac{dz}{w}$ .

In steady flows the particle trajectories coincide with the streamlines. The Poincaré section is a map of intersections of streamlines which traverse a fixed plane. A solenoidal vector field in three dimension is equivalent to a time-dependent, one-dimensional Hamiltonian system, and the Poincaré sections of streamlines correspond to phase diagrams of the Hamiltonian system [4].

### Numerical Method

The governing equations are numerically solved by the Marker-and-Cell (MAC) method. In the MAC method, the Poisson equation for pressure needs to be solved in place of the continuity equation (2). We consider the obtained state as a steady state and stop the time integration of Eq.(1) when the magnitude of the velocity increment for a time step becomes sufficiently small.

The flows in lid-driven cavities have a variety of spatial scales. We therefore have to use numerical schemes with high accuracy and high resolution in the simulation. In the present study the spectral-like Combined Compact Difference (CCD) scheme [5] is adopted to evaluate spatial derivatives. First and second derivatives in the momentum equation and the Poisson equation are evaluated by using the CCD scheme.

## Results

In this section we present the results of a square cavity with  $\Lambda=6.55$ . Figure 2 shows a typical streamline of chaotic motion as well as a streamline which forms a closed curve in the Poincaré section.

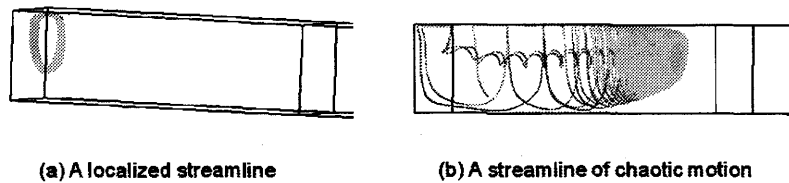


Figure2: A localized streamline and a streamline of chaotic motion for  $Re = 300$ .

In Fig.3 we present the Poincaré sections in the region near the end-wall for  $Re = 100, 200, 250$  and  $300$ . The left side is the end-wall. At  $Re = 100$ , many points form closed curves. The closed curves in the Poincaré section imply that a streamline covers an invariant torus. The map has seven resonant islands. Dots in the outer region surrounding the tori show chaotic motion. In the Poincaré section at  $Re = 200$  and  $300$ , there are fewer closed curves. The figure at  $Re = 250$  is the Poincaré section near the 3:1 resonance. This corresponds well with the phase portrait of a resonant Hamiltonian system [6]. In the case of  $\Lambda=6.55$  the value of  $Re$  at which the 3:1 resonance occurs is smaller for  $\Gamma=1$  than those for  $\Gamma=0.5$  and  $1.5$ .

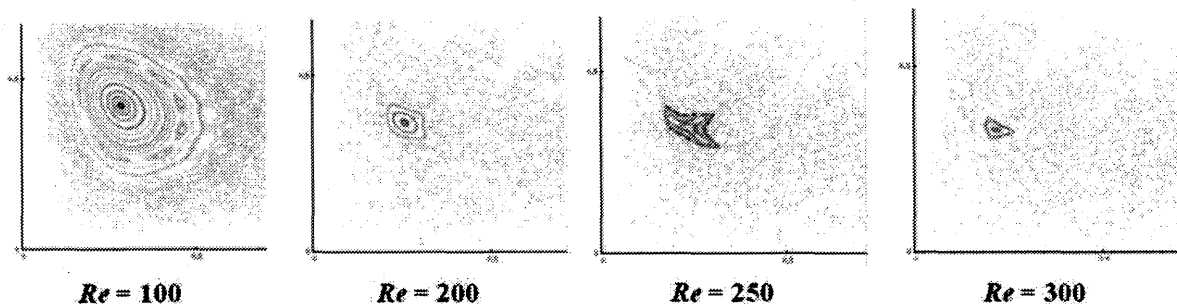


Figure3: Poincaré sections in the region near the end-wall for  $Re = 100, 200, 250$  and  $300$ .

## Concluding Remarks

We have studied the variation of the structure of the flow field with the Reynolds number. The Poincaré sections of the resonances are found to correspond well with the phase portrait of a resonant Hamiltonian system.

## Acknowledgements

This work was supported by a Grant-in-Aid for Scientific Research from Japan Society for the Promotion of Science No.21540383. Computer resources were provided by the Information Technology Center of Nagoya University.

## References

- [1] K. Ishii and R. Iwatsu, Numerical Simulation of the Lagrangian flow structure in a driven cavity, *Topological Fluid Mechanics* (eds. H.K. Moffatt and A. Tsinobar), pp. 54-63, (Cambridge Univ. Press, 1990).
- [2] K. Ishii, R. Iwatsu, T. Kambe and T. Matsumoto, Chaotic Streamlines in Viscous Incompressible Flows, *Nonlinear World*, pp. 490-506, (World Scientific, 1990).
- [3] K. Ishii, T. Nihei and S. Adachi, Accurate Numerical Simulation of Three-dimensional Lid-driven Cavity Flows with Different Span Length, *Vortex Dominated Flows* (eds. D. Blackmore, E. Krause and C. Tung), pp. 87-96, (World Scientific Publishing, 2005).
- [4] K.J. Whiteman, Invariants and stability in classical mechanics, *Rep. Prog. Phys.*, 40, pp. 1033-1069, 1977
- [5] T. Nihei and K. Ishii, A Fast Solver of the Shallow Water Equations on a Sphere using a Combined Compact Difference Scheme, *J. Comput. Phys.*, 187, pp. 639-659, 2003..
- [6] V.I. Arnold, V.V. Kozlov and A.I. Neishtadt, *Dynamical Systems III*, pp. 259-260, (Springer(original in Russian: VINITI, 1985), 1988).